



ENERGYONE



ENERGYONE
EV CHARGING

✉ hello@energyone.biz

🌐 www.energyone.biz

📍 13802 N. Scottsdale Rd, 151-70., Scottsdale, AZ.

☎ 480.419.8210

BOOST SERIES

EDC330

DCFC

30/40/50kW

2 years
limited
warranty

ENERGYONE
EV CHARGING



ISO 15118



COMPATIBLE
CCS PORT/13 FT



DURABILITY
NEMA 3R and IK10



INTERACTION
7 inch touch screen



NETWORK
WiFi, CAT7, LTE



CONNECTIVITY
OCPP 1.6J

www.energyone.biz 480.419.8210



HYPERVOLT SERIES

EDC3100

DCFC

2 years
limited
warranty

ENERGYONE
EV CHARGING

60/90/120/150/180kW



ISO 15118



COMPATIBLE
CCS PORT/13 FT



DURABILITY
NEMA 3R and IK10



INTERACTION
7 inch touch screen




NETWORK
WiFi, CAT7, LTE



CONNECTIVITY
OCPP 1.6J

www.energyone.biz 480.419.8210

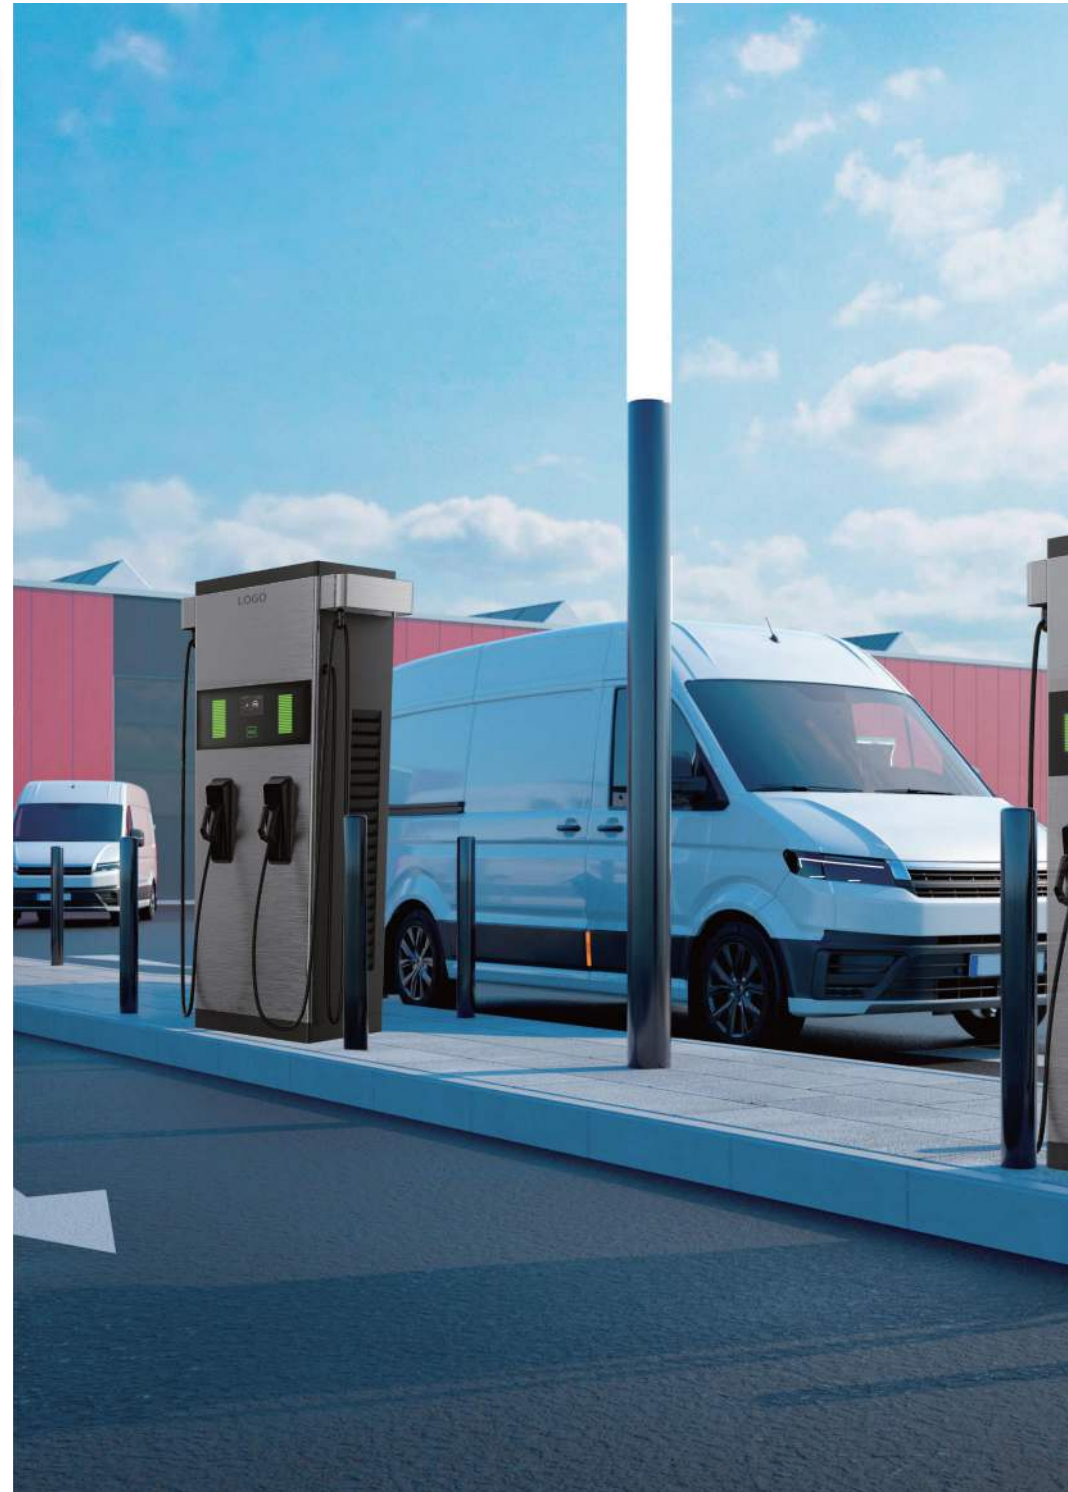

Model No.		EDC330		EDC340		EDC350
AC Input	Number of phase/ wire	3ph / L1,L2, L3, N, PE				
	Voltage Rating	200 - 480Vac				
	Max. Input Amperage	40A		50A		60A
	Frequency	50~60Hz				
	Power factor	PF 0.98@Rated load				
	Efficiency	>96%				
DC Output	Maximum Power	60KW		40KW		50KW
	Voltage Operating Range	200-1000V				
	Maximum Current	300A@1000Vdc		40A@1000Vdc		50A@1000Vdc
	Connector and Cable	CCS1with 13ft cable				

Function

EV Communication	ISO 15118
User Authentication	ISO 14443 A/B
Display	7 inch touch screen
Network	Ethernet, LTE, Wi-Fi
Connectivity	OCPP 1.6J

Protection & Standard

Certificate	ETL, FCC
Safety Compliance	UL2202, UL2231-1,UL2231-2
Multiple Protection	OVP, UVP, OPP, OTP, SPD,RCD, IMD, OCP
Warranty	2 years

Environmental

Storage Temperature	-40°F to 158°F
Operating Temperature	-22°F to 122°F
Anti-vandalism	IK10(not include LCD & RFID cover)
Ingression	NEMA 3R
Relative Humidity	Up to 95% non-condensing
Cooling	Forced Air
Operating noise level	65dB
Altitude	6561ft

Model No.		EDC3060	EDC3090	EDC3120	EDC3150	EDC3180
AC Input	Number of phase/ wire	3ph / L1,L2, L3, N, PE				
	Voltage Rating	200 - 480Vac-15% \checkmark				
	Max. Input Amperage	100A	135A	180A	226A	270A
	Frequency	50~60Hz				
	Power factor	PF 0.98@Rated load				
	Efficiency	>96%				
DC Output	Maximum Power	60KW	90KW	120KW	150KW	180KW
	Voltage Operating Range	200-1000V				
	Maximum Current	60A@1000Vdc	90A@1000Vdc	120A@1000Vdc	150A@1000Vdc	180A@1000Vdc
	Connector and Cable	CCS1with 13ft cable				

Function

EV Communication	ISO 15118
User Authentication	ISO 14443 A/B
Display	7 inch touch screen
Network	Ethernet, LTE, Wi-Fi
Connectivity	OCPP 1.6J

Protection & Standard

Certificate	ETL, FCC
Safety Compliance	UL2202, UL2231-1,UL2231-2
Multiple Protection	OVP, UVP, OPP, OTP, SPD, RCD, IMD, OCP
Warranty	2 years

Environmental

Storage Temperature	-40°F to 158°F
Operating Temperature	-22°F to 122°F
Anti-vandalism	IK10(not include LCD & RFID cover)
Ingression	NEMA 3R
Relative Humidity	Up to 95% non-condensing
Cooling	Forced Air
Operating noise level	65dB
Altitude	6561ft